

59158 U.S. PTO
05/14/97

8
ASSISTANT COMMISSIONER FOR PATENTS
Washington, D.C. 20231

\$1106.00 101 A
PATENT
Atty. Docket No. ANDU:434
(Client Ref. 418)

71164 U.S. PTO
08/856440
05/14/97

Sir:

Transmitted herewith for filing is the patent application of:

Inventor(s): Ronald J. Brandau, Russell W. Dearnley, and Gang Xu

For: "A HIGH ISOLATION DUAL POLARIZED ANTENNA SYSTEM USING DIPOLE RADIATING ELEMENTS"

Enclosed are:

- ☒ A specification consisting of: a 10-page disclosure, 6 page(s) of claims, and an abstract of the disclosure.
☒ Unexecuted Declaration.
☒ One (1) set of formal drawings consisting of 8 sheets.
☐ A Power of Attorney executed by the Inventor(s)/Assignee.
☐ A Verified Statement to establish Small Entity status under 37 CFR 1.9 and 37 CFR 1.27.
☐ An Information Disclosure Statement.
Other: _____

	CLAIMS AS FILED		Small Entity		Other Than Small Entity	
Total Claims	28	-20 =	8	x \$ 11 =	\$ or x \$22 =	\$176.00
Independent Claims	5	-3 =	2	x \$ 40 =	\$ or x \$80 =	\$160.00
Multiple Dependent Claims Presented				+ \$130 =	or + \$260 =	\$00
Basic Fee				\$385.00	or	\$770.00
TOTAL FILING FEE				\$00		\$1,106.00

A check in the amount of the Total Filing Fee is enclosed. However, if the check is missing or insufficient, the Commissioner is authorized to charge any additional fees which may be required, or credit any overpayment, to Account No. 01-2508, Order No. ANDU:434. Two duplicate copies of this sheet are enclosed.

Please address all correspondence in connection with this application to: Stephen G. Rudisill, Arnold, White & Durkee, P.O. Box 4433, Houston, Texas 77210, telephone (312) 744-0090.

ARNOLD, WHITE & DURKEE



Typed Name: Timothy R. Baumann


Reg. No.: P 40,502

ARNOLD, WHITE & DURKEE

P. O. BOX 4433

Houston, TX 77210

Attorneys for Applicant(s)

EXPRESS MAIL MAILING LABEL NUMBER	EM580068025US
DATE OF DEPOSIT	May 14, 1997
I hereby certify that this paper or fee is being deposited with the United States Postal Service "EXPRESS MAIL POST OFFICE TO ADDRESSEE" service under 37 C.F.R. 1.10 on the date indicated above and is addressed to Box Patent Application, Assistant Commissioner for Patents, Washington, D.C. 20231.	
Signature	



05/14/97

PATENT
ANDU:434
(Client Ref. 418)

APPLICATION FOR UNITED STATES LETTERS PATENT

for

**A HIGH ISOLATION DUAL POLARIZED ANTENNA
SYSTEM USING DIPOLE RADIATING ELEMENTS**

by

Ronald J. Brandau

Russell W. Dearnley


Gang Xu

EXPRESS MAIL MAILING LABEL

NUMBER: EM580068025US

DATE: May 14, 1997

I hereby certify that this paper or fee is being deposited with the United States Postal Service "EXPRESS MAIL POST OFFICE TO ADDRESSEE" service under 37 C.F.R. 1.10 on the date indicated above and is addressed to: Assistant Commissioner for Patents, Washington D.C. 20231.



Signature



A HIGH ISOLATION DUAL POLARIZED ANTENNA SYSTEM USING DIPOLE RADIATING ELEMENTS

BACKGROUND OF THE INVENTION

Base stations used in wireless telecommunication systems have the capability
5 to receive linear polarized electromagnetic signals. These signals are then processed
by a receiver at the base station and fed into the telephone network. In practice, the
same antenna which receives the signals can also be used to transmit signals if the
transmitted signals are at different frequencies than the received signals.

A wireless telecommunication system suffers from the problem of multi-path
10 fading. Diversity reception is often used to overcome the problem of severe multi-
path fading. A diversity technique requires at least two signal paths that carry the
same information but have uncorrelated multi-path fadings. Several types of diversity
reception are used at base stations in the telecommunications industry including space
diversity, direction diversity, polarization diversity, frequency diversity, and time
15 diversity. A space diversity system receives signals from different points in space
requiring two antennas separated by a significant distance. Polarization diversity uses
orthogonal polarization to provide uncorrelated paths.

As is well-known in the art, the sense or direction of polarization of an antenna
is measured from a fixed axis and can vary, depending upon system requirements. In
20 particular, the sense of polarization can range from vertical polarization (0 degrees) to
horizontal polarization (90 degrees). Currently, the most prevalent types of
polarization used in systems are those which use vertical/horizontal and $+45^\circ/-45^\circ$
polarization("slant 45° "). However, other angles of polarization can be used. If an
antenna receives or transmits signals of two polarizations normally orthogonal, they
25 are also known as dual polarized antennas.

An array of slant 45° polarized radiating elements is constructed using a linear
or planar array of crossed-dipoles located above a ground plane. A crossed dipole is a
pair of dipoles whose centers are co-located and whose axes are orthogonal. The axes
of the dipoles are arranged such that they are parallel with the polarization sense

required. In other words, the axes of each of the dipoles is positioned at some angle with respect to the vertical axis of the antenna array.

One problem associated with such a configuration is the interaction of the electromagnetic field of each crossed dipole with the fields of the other crossed
5 dipoles and the surrounding structures which support and house the crossed dipoles. As is well known in the art, the individual electromagnetic fields surrounding the dipoles transfer energy to each other. This mutual coupling or leakage influences the correlation of the two orthogonally polarized signals; the amount of coupling is often referred to as "isolation." The isolation between orthogonally polarized signals is
10 preferably -30 dB or less.

The visual impact of base station towers on communities has become a societal concern. It has become desirable to reduce the size of these towers and thereby lessen the visual impact of the towers on the community. The size and scale of the towers can be reduced by using base station towers with fewer antennas. This
15 can be achieved if dual polarized antennas and polarization diversity are used. Such systems replace systems using space diversity which require pairs of vertically polarized antennas. Some studies indicate that, for urban environments, polarization diversity provides an equivalent signal quality as space diversity. With the majority of base station sites located in urban environments, it is likely that dual polarized
20 antennas will be used in place of the conventional pairs of vertically polarized antennas.

SUMMARY OF THE INVENTION

It is a principle object of the invention to provide an antenna array comprised of dual polarized radiating elements which are used to receive signals for a polarization
25 diversity receiver.

It is a further object of the invention to provide an antenna array where the radiating elements are comprised of crossed-dipole elements.

It is another object of the invention to provide an antenna array which improves isolation between the sum of one set of like-polarized signals and the sum of the orthogonal set of polarized signals;

It is yet another object of the invention to provide an antenna that minimizes the number of antennas required thereby providing an aesthetically pleasing structure that is of minimum size and scale.

It is still another object of the invention to provide an array of radiating elements where electrical "downtilt" is used.

These and other objects of the invention are provided by an improved antenna system comprising an array of radiating elements, the array having a length and placed on a ground plane and having a vertical axis along its length, the array comprising a plurality of dipole radiators, said radiators comprised of first and second crossed dipoles, said dipoles aligned at a predetermined angle with respect to said vertical axis, said radiating elements producing first electromagnetic fields; a plurality of supports, said supports perpendicular to said vertical axis and placed between selected of said plurality of dipole radiators; a plurality of metallic parasitic elements placed in a selected of said plurality of supports, said first electromagnetic fields exciting currents in said metallic parasitic elements, said currents creating second electromagnetic fields, said second electromagnetic fields canceling with said first electromagnetic fields.

BRIEF DESCRIPTION OF THE DRAWINGS

In the accompanying drawings:

FIG. 1 is a block diagram of the overall system which utilizes antennas according to principles of the present invention;

FIG. 2 shows a perspective view of an array of receivers together with the parasitic elements according to principles of the present invention;

FIG. 3 shows a top view of the array of FIG. 2 according to principles of the present invention;

FIG. 4 is an end view of the array of FIG. 2 according to principles of the present invention;

FIG. 5 is a top view showing de-coupling rods used as parasitic elements according to principles of the present invention;

5 FIG. 6 is an end view showing de-coupling rods used as parasitic elements according to principles of the present invention;

FIG. 7 is a top view showing de-coupling rods used as parasitic elements according to principles of the present invention; and

10 FIG. 8 is an end view showing de-coupling rods used as parasitic elements according to principles of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Referring now to FIG. 1, a user with a cellular phone 4 transmits an electromagnetic signal to a base station 5. The base station 5 comprises a plurality of antennas 6a, 6b, 6c, and 6d connected to a platform 6e. As discussed below, each
15 antenna comprises a plurality of crossed (co-located, orthogonal) dual dipole radiating elements. Alternatively, the antennas can be connected to a tower 7. The platform 6e is coupled to a tower 7 which elevates the antennas above surrounding buildings and other obstructions. The received signals pass over a plurality of transmission lines 8a, 8b, 8c, and 8d to a base station processing system 3 which includes a diversity
20 receiver 9. From the base station processing system 3, the processed signals are transmitted over land phone lines and into the telephone network using equipment and techniques which are well known to those skilled in the art.

Referring now to FIGs. 2-4, an array (antenna) 10 of crossed, dual-polarized dipole radiating elements 11a, 11b, 11c, and 11d are connected to a ground plane 12.
25 The composition and dimensions of the radiating elements 11a, 11b, 11c, and 11d and the ground plane 12 determine the radiation characteristics, beam width, and the impedance of the radiating elements. Preferably, the radiating elements 11a, 11b, 11c, and 11d and the ground plane 12 are composed of some metal such as aluminum.

However, other metals can be used to construct the radiating elements and the ground plane 12 such as copper or brass.

It will be understood by those skilled in the art that the gain of the antenna is proportional to the number of spaced radiating elements present in the array. In other words, increasing the number of radiating elements in the array increases the gain while decreasing the number of radiating elements decreases the antenna's gain. Therefore, although only four radiating elements are shown, the number of radiating elements can be increased to any number to increase the gain. Conversely, the number of radiating elements can be reduced as required thereby reducing the gain.

The radiating elements 11a, 11b, 11c, and 11d transmit and receive electromagnetic signal transmissions and are comprised of pairs of dipoles 14a and 14b, 16a and 16b, 18a and 18b and 20a and 20b, respectively. The dipoles comprising the radiating elements 11a, 11b, 11c, and 11d are crossed and configured with 45 degree slant angles (with respect to the axis of the array 13). That is, the axes of the dipoles are arranged such that they are parallel with the polarization sense required. As shown, the slant angles $+\alpha$ and $-\alpha$ are +45 degrees and -45 degrees, respectively. Although shown with slant angles of +45 degrees and -45 degrees, it will be understood by those skilled in the art that these angles can be varied to optimize the performance of the antenna. Moreover, each angle need not be identical in magnitude. For example, $+\alpha$ and $-\alpha$ can be +30 degrees and -60 degrees, respectively.

Each of the radiating elements 11a, 11b, 11c, and 11d receive signals having polarizations of +45 degrees and -45 degrees. That is, one dipole in the radiating element receives signals having polarizations of +45 degrees while the other dipole receives signals with polarizations of -45 degrees. The received signals from parallel dipoles, 14a, 16a, 18a, 20a or 14b, 16b, 18b, and 20b, are combined using a feed network (not shown) for each polarization. The feed network is composed of coaxial, microstrip, stripline, or other transmission line structures. The two combined signals are fed to a diversity receiver which chooses the strongest amongst these two signals for further processing. Each of the radiating elements 11a, 11b, 11c, and 11d can also

act as a transmitter provided that the transmitted signal is at a different frequency than the received signal.

A parasitic element 22 is placed on a support 24. In order to be non-conducting, the support is comprised of polyethylene foam. However, other suitable
5 non-conducting materials such as other non-conducting plastics or foams can be substituted for polyethylene foam and used for construction of the support 24. The support 24 is first formed and attached to the back plane 12. A groove is then cut into the support 24 into which the parasitic element 22 is inserted.

In order for currents to be induced, the parasitic element 22 is formed of metal.
10 This metal is preferably aluminum, although other metals such as copper or brass can also be used. A primary electromagnetic wave or field incident upon the array structure induces currents on the surfaces of the crossed dipoles of each of the radiating elements of the array, the parasitic elements, and the surrounding metal structure. These induced currents create a weaker secondary electromagnetic field
15 which will combine with the primary electromagnetic field. A state of equilibrium will occur such that the final electromagnetic field is different from the primary electromagnetic field. The dimensions and positions of the parasitic elements are a factor in determining the final field. In other words, the improved isolation of the present invention is achieved by currents excited on the parasitic elements which re-
20 radiate energy that cancels the energy which couples from one polarization to the other causing the isolation to be at a minimum.

The parasitic elements are placed halfway between the crossed dipole radiating elements of the array and are perpendicular to the axis 13 of the array. However, parasitic elements are not necessarily placed in between every element of the array. A
25 network analyzer is used to determine the optimum number and positioning of the elements. In particular, the network analyzer is employed such that the isolation of any given configuration of radiating elements and parasitic elements can be measured. The length of the parasitic elements controls the magnitude of the current produced. For example, with the length at approximately one-half a wavelength, the maximum

amount of current is produced. Thus, the performance of the system can also be optimized by changing the length of some or all of the parasitic elements.

Positioning the parasitic element above the top of the crossed dipoles has been found to optimize isolation for this array configuration. However, the height of
5 placement of the parasitic element can vary depending on the array configuration.

The parasitic elements are situated so as to cause no undue side effects such as degradation of the return loss (VSWR) nor do the parasitic elements unduly disturb the normal array radiation patterns. It has been found that optimum antenna
10 performance occurs when the parasitic elements are placed parallel to or perpendicular to the vertical axis of the array. Placing the parasitic elements at other angles with respect to the vertical axis of the array has been found to detrimentally affect antenna performance. As discussed above, a network analyzer is used to determine when isolation improves and radiation patterns measured confirm to pattern performance.

In an illustrative embodiment of the configuration of FIG. 2, four crossed-
15 dipole antennas were placed on a ground plane 480 mm long by 150 mm wide to operate in the PCS/N band of frequencies which is 1710-1990 MHz. The vertical axis 13 of the array stretched along the 480 mm length. Four dual polarized, crossed-dipole radiating elements were used. The first radiating element was placed 60 mm from the edge, the second element was placed 120 mm from the first element, the
20 third 120 mm from the second element, and the fourth 120 mm from the third element. The elements were aligned along the vertical axis of the array having slant angles of +45 degrees and -45 degrees with respect to the vertical axis 13 of the array.

Two supports were situated 120 mm from the edges of the ground plane and perpendicular to the vertical axis of the array. The supports were 75 mm tall and had
25 a thin, rectangular parasitic element placed on top. The parasitic element was 5 mm wide and 150 mm long. The parasitic elements were placed at the top of the support and extended along the full length of the support.

Referring now to FIGs. 5 and 6, an array 210 of crossed, dual-dipole radiating elements 202, 203, and 204 are attached to a ground plane 201 to operate in the
30 cellular band of frequencies of 820-960 MHz. As discussed above, the composition

and dimensions of the ground plane 201 and the radiating elements 202, 203, and 204 determine the radiation characteristics, beam width, and the impedance of the antennas.

The radiating elements 202, 203, and 204 transmit and receive electromagnetic
 5 signal transmissions and are comprised of pairs of dipoles, 211a and 211b, 212a and 212b, and 213a and 213b, respectively. The dipoles comprising the radiating elements 202, 203, and 204 are crossed and configured with 45 degree slant angles (with respect to the axis of the array 215). That is, the axes of the dipoles are arranged such that they are parallel with the polarization sense required. As shown, the slant
 10 angles $+\alpha$ and $-\alpha$ are +45 degrees and -45 degrees, respectively. Although shown with slant angles of +45 degrees and -45 degrees, it will be understood by those skilled in the art that these angles can be varied to optimize the performance of the antenna. A front side wall 207 and rear side wall 208 contribute to the radiation characteristics of the antenna.

15 Each of the radiating elements 202, 203, and 204 receive signals having polarizations of +45 degrees and -45 degrees. The received signals from parallel dipoles 211a, 212a, and 213a, or 211b, 212b, and 213b, are combined using a feed network for each polarization. The feed network is composed of coaxial, microstrip,, stripline, or other types of transmission lines. A diversity receiver connected to the
 20 antenna then chooses the strongest amongst these two combined signals for further processing. Each of the elements 202, 203, and 204 can also act as a transmitter provided that the transmitted signal is at a different frequency than the received signal.

A parasitic element 205 is supported and elevated by pairs of rod supports 206a and 206b. The parasitic element preferably acts as a de-coupling rod. The
 25 parasitic element is perpendicular to the vertical axis 215 of the array. The rod supports are constructed of a non-conducting material. Although one parasitic element is shown, it will be understood that the exact number of parasitic elements can be varied and depend upon the exact configuration and other required characteristics of the antenna.

Referring now to FIGs. 7 and 8, an array 310 of crossed, dual-dipole radiating elements 302, 303, and 304 are connected to a ground plane 301 to operate in the cellular band of frequencies of 820-960 MHz. As discussed above, the composition and dimensions of the ground plane 301 and radiating elements 302, 303, and 304
 5 determine the radiation characteristics, beam width, and the impedance of the antennas.

The radiating elements 302, 303, and 304 transmit and receive electromagnetic signal transmissions and are comprised of pairs of dipoles, 311a and 311b, 312a and 312b, and 313a and 313b, respectively. The dipoles comprising the radiating
 10 elements 302, 303, and 304 are crossed and configured with 45 degree slant angles (with respect to the axis of the array 315). That is, the axes of the dipoles are arranged such that they are parallel with the polarization sense required. As shown, the slant angles $+\alpha$ and $-\alpha$ are +45 degrees and -45 degrees, respectively. Although shown with slant angles of +45 degrees and -45 degrees, it will be understood by those
 15 skilled in the art that these angles can be varied to optimize the performance of the antenna. A front side wall 307 and rear side wall 308 contribute to the radiation characteristics of the antenna.

Each of the radiating elements 302, 303, and 304 receive signals having polarizations of +45 degrees and -45 degrees. The received signals from parallel
 20 dipoles 311a, 312a, and 313a or 311b, 312b, and 313b, are combined using a feed network for each polarization. The feed network is composed of coaxial, microstrip, stripline, or other type of transmission line. A diversity receiver connected to the antenna then chooses the strongest amongst these two combined signals for further processing. Each of the elements 302, 303, and 304 can also act as a transmitter
 25 provided that the transmitted signal is at a different frequency than the received signal.

A first parasitic element 305a is supported and elevated by rod supports 306a and 306b. The parasitic element 305a is parallel to the vertical axis 315 of the array. Additionally, a second parasitic element 305b is supported and elevated by rod supports 306c and 306d. The parasitic element 305b is also parallel to the vertical
 30 axis 315 of the array and acts as a de-coupling rod. The rod supports are constructed

of non-conducting material. Although two parasitic elements are illustrated in this embodiment, it will be understood that the number can be varied according to the exact configuration and operating characteristics of the array.

Thus, an antenna array is provided which is comprised of dual polarized
5 radiating elements and produces two orthogonally polarized signals. Furthermore, the invention provides an antenna array where the antennas are comprised of crossed-dipole elements and which improves isolation between the electromagnetic fields of the crossed dipole elements. An antenna has also been provided which minimizes the number of antennas required in a wireless telecommunication system thereby providing
10 an aesthetically pleasing structure that is of minimum size and scale.

While the present invention has been described with reference to one or more preferred embodiments, those skilled in the art will recognize that many changes may be made thereto without departing from the spirit and scope of the present invention which is set forth in the following claims.

CLAIMS

1. An antenna for receiving electromagnetic signals comprising:
a ground plane with a length and having a vertical axis along said length;
a plurality of dipole radiating elements, said radiating elements comprised of
first and second co-located, orthogonal dipoles, said dipoles aligned at first and
5 second predetermined angles with respect to said vertical axis, said radiating elements
and ground plane producing first electromagnetic fields in response to said
electromagnetic signals;
a plurality of supports, said supports connected to said ground plane and
perpendicular to said vertical axis and placed between selected of said plurality of
10 dipole radiating elements;
a plurality of metallic parasitic elements placed in a selected of said plurality
of supports, said first electromagnetic fields exciting currents in said metallic parasitic
elements, said currents creating second electromagnetic fields, said second
electromagnetic fields canceling with portions of said first electromagnetic fields.
2. The antenna of claim 1 whereby said first predetermined angle is
substantially equal to +45 degrees with respect to said vertical axis and said second
predetermined angle is substantially equal to -45 degrees with respect to said vertical
axis.
3. The antenna of claim 1 wherein said parasitic elements are composed
of aluminum.
4. The antenna of claim 1 wherein said support comprises an upper
surface and said parasitic elements are positioned along said upper surface of said
support.

5. The antenna of claim 1 wherein said plurality of supports is located midway between said radiating elements.

6. The antenna of claim 1 wherein said ground plane is composed of metal.

7. The antenna of claim 1 wherein said plurality of radiating elements includes exactly four radiating elements.

8. The antenna of claim 7 wherein said plurality of supports includes exactly two supports.

9. The antenna of claim 1 wherein said radiating elements transmit electromagnetic signals.

10. An antenna for receiving electromagnetic signals comprising:
a ground plane with a length, said ground plane having a vertical axis along said length;

a plurality of radiating elements, said radiating elements comprised of first and second co-located, orthogonal dipoles, said first dipoles aligned at substantially a +45 degree angle with respect to said vertical axis, said second dipoles aligned at substantially a -45 degree angle with respect to said vertical axis, said radiating elements and ground plane producing a first electromagnetic field;

a plurality of supports connected to said ground plane, said supports perpendicular to said vertical axis and placed between selected of said plurality of dipole radiating elements;

a plurality of metallic parasitic elements placed in a selected of said plurality of supports, said first electromagnetic fields exciting currents in said metallic parasitic elements, said currents creating second electromagnetic fields, said second electromagnetic fields canceling with portions of said first electromagnetic fields; and

diversity reception means coupled to said plurality of radiating elements for selecting between said plurality of electrical signals.

11. The antenna of claim 10 wherein said parasitic elements are composed of aluminum.

12. The antenna of claim 10 wherein said parasitic elements are positioned along an upper surface of said supports.

13. The antenna of claim 10 wherein said plurality of supports is located midway between said antennas.

14. The antenna of claim 10 wherein said ground plane is composed of metal.

15. The antenna of claim 10 wherein said plurality of radiating elements includes exactly four radiating elements.

16. A method for providing high isolation for an array of radiating elements comprising the steps of:

providing a ground plane having a vertical axis;

5 providing a plurality of dipole radiating elements, said radiating elements comprised of first and second co-located, orthogonal dipoles, said dipoles aligned at a predetermined angle with respect to said vertical axis, said radiating elements having a top surface;

producing first electromagnetic fields in said radiating elements;

10 providing a plurality of supports, and placing said supports perpendicular to said vertical axis and between selected of said plurality of dipole radiating elements;

providing a plurality of metallic parasitic elements placed in a selected of said plurality of supports,

exciting currents in said metallic parasitic elements;
 creating second electromagnetic fields radiating from said parasitic elements;
 15 and
 canceling with portions of said first electromagnetic fields with said second
 electromagnetic fields.

17. The method of claim 16 comprising the further step of placing said
 parasitic elements midway between the top surfaces of said radiating elements and
 said ground plane.

18. The method of claim 16 comprising the further step of orienting the
 radiating elements at a predetermined angle with respect to the vertical axis of the
 array.

19. An antenna for receiving electromagnetic signals comprising:
 a ground plane with a length and having a vertical axis along said length;
 a plurality of dipole radiating elements, said radiating elements comprised of
 first and second co-located, orthogonal dipoles, said dipoles aligned at first and
 5 second predetermined angles with respect to said vertical axis, said antennas radiating
 elements producing first electromagnetic fields in response to said electromagnetic
 signals;

a plurality of supports, said supports connected to said ground plane and
 parallel to said vertical axis and placed adjacent selected of said plurality of dipole
 10 radiating elements;

a plurality of metallic parasitic elements placed in a selected of said plurality
 of supports, said first electromagnetic fields exciting currents in said metallic parasitic
 elements, said currents creating second electromagnetic fields, said second
 electromagnetic fields canceling with portions of said first electromagnetic fields.

20. The antenna of claim 18 whereby said first predetermined angle is substantially equal to +45 degrees with respect to said vertical axis and said second predetermined angle is substantially equal to -45 degrees with respect to said vertical axis.

21. The antenna of claim 19 wherein said parasitic elements are composed of aluminum.

22. The antenna of claim 19 wherein said supports comprises an upper surface and said parasitic elements are positioned along an upper surface of said support.

23. The antenna of claim 19 wherein said plurality of supports is located adjacent to said radiating elements.

24. The antenna of claim 19 wherein said ground plane is composed of metal.

25. The antenna of claim 19 wherein said plurality of radiating elements includes exactly three radiating elements.

26. The antenna of claim 25 wherein said plurality of supports includes exactly two sets of supports.

27. A method for providing high isolation for an array of radiating elements comprising the steps of:

providing a ground plane having a vertical axis;

providing a plurality of dipole radiating elements, said radiating elements

5 comprised of first and second co-located, orthogonal dipoles, said dipoles aligned at a

predetermined angle with respect to said vertical axis, said radiating elements having a top surface;

producing first electromagnetic fields in said radiating elements;

- 10 providing a plurality of supports, and placing said supports parallel to said vertical axis and adjacent selected of said plurality of dipole radiating elements;
- providing a plurality of metallic parasitic elements placed in a selected of said plurality of supports,
- exciting currents in said metallic parasitic elements;
- creating second electromagnetic fields radiating from said parasitic elements;
- 15 and

canceling with portions of said first electromagnetic fields with said second electromagnetic fields.

28. The method of claim 27 comprising the further step of placing said parasitic elements midway between the top surface of said radiating element and ground plane of selected of said housings.

29. The method of claim 27 comprising the further step of orienting the radiating elements at a predetermined angle with respect to the vertical axis of the array.

ABSTRACT

An antenna for receiving electromagnetic signals comprises: a ground plane with a length and having a vertical axis along the length. A plurality of dipole radiating elements, the radiating elements are comprised of first and second co-located, orthogonal dipoles, the dipoles are aligned at first and second predetermined
5 angles with respect to the vertical axis, the radiating elements and ground plane produce first electromagnetic fields in response to said electromagnetic signals. A plurality of supports, the supports are connected to the ground plane and perpendicular to the vertical axis and placed between selected of the plurality of dipole radiating elements. A plurality of metallic parasitic elements are placed in a
10 selected of said plurality of supports, the first electromagnetic fields exciting currents in said metallic parasitic elements, the currents creating second electromagnetic fields, the second electromagnetic fields canceling with portions of the first electromagnetic fields.

DECLARATION

PATENT ANDU:434
(Client Ref. 418)

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

The below named inventors are the original, first and joint inventors of the subject matter which is claimed and for which a patent is sought on the invention entitled "**A HIGH ISOLATION DUAL POLARIZED ANTENNA SYSTEM USING DIPOLE RADIATING ELEMENTS**", the specification of which:

 X is attached hereto.

 was filed on as Application Serial No.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

**PRIOR FOREIGN/PCT APPLICATION(S) FILED WITHIN 12 MONTHS (6 MONTHS FOR DESIGN)
PRIOR TO THIS APPLICATION AND ANY PRIORITY CLAIMS UNDER 35 U.S.C. §119(a)-(d)**

I hereby claim foreign/pct priority benefits under Title 35, United States Code, §119 of any foreign/pct application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

PRIOR FOREIGN/PCT APPLICATION(S)			<u>Priority Claimed</u>
			Yes/No
(Number)	(Country)	(Date Filed)	

CLAIM FOR BENEFIT OF PRIOR U.S. PROVISIONAL APPLICATION(S) (35 U.S.C. § 119(e))

I hereby claim the benefit under Title 35, United States Code, §119(e) of any United States provisional application(s) listed below:

(Application Serial No.)	(Filing Date)	(Status)

CLAIM FOR BENEFIT OF PRIOR U.S. APPLICATION(S) (35 U.S.C. § 120)

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a), regarding events which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial No.)	(Filing Date)	(Status)

I hereby direct that all correspondence and telephone calls be addressed to **Stephen G. Rudisill, Arnold, White & Durkee, P.O. Box 4433, Houston, Texas 77210, (312) 744-0090.**

I hereby declare that all statements made of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Inventor's Full Name: Ronald J. Brandau
(First) (Initial) (Last)

Inventor's Signature: _____

Date: _____ Country of Citizenship: U.S.A.

Residence: 6841 West 175 Place, Tinley Park, IL 60477 U.S.A.
(Include number, street name, city, state, and country)

Inventor's Full Name: Russell W. Dearnley
(First) (Initial) (Last)

Inventor's Signature: _____

Date: _____ Country of Citizenship: Australia

Residence: 932 Hidden Lake Road, Naperville, IL 60565 U.S.A.
(Include number, street name, city, state, and country)

Inventor's Full Name: Gang (none) Xu
(First) (Initial) (Last)

Inventor's Signature: _____

Date: _____ Country of Citizenship: Australia

Residence: 22 Compton Street, Reservoir, Victoria, Australia 3073 Australia
(Include number, street name, city, state, and country)

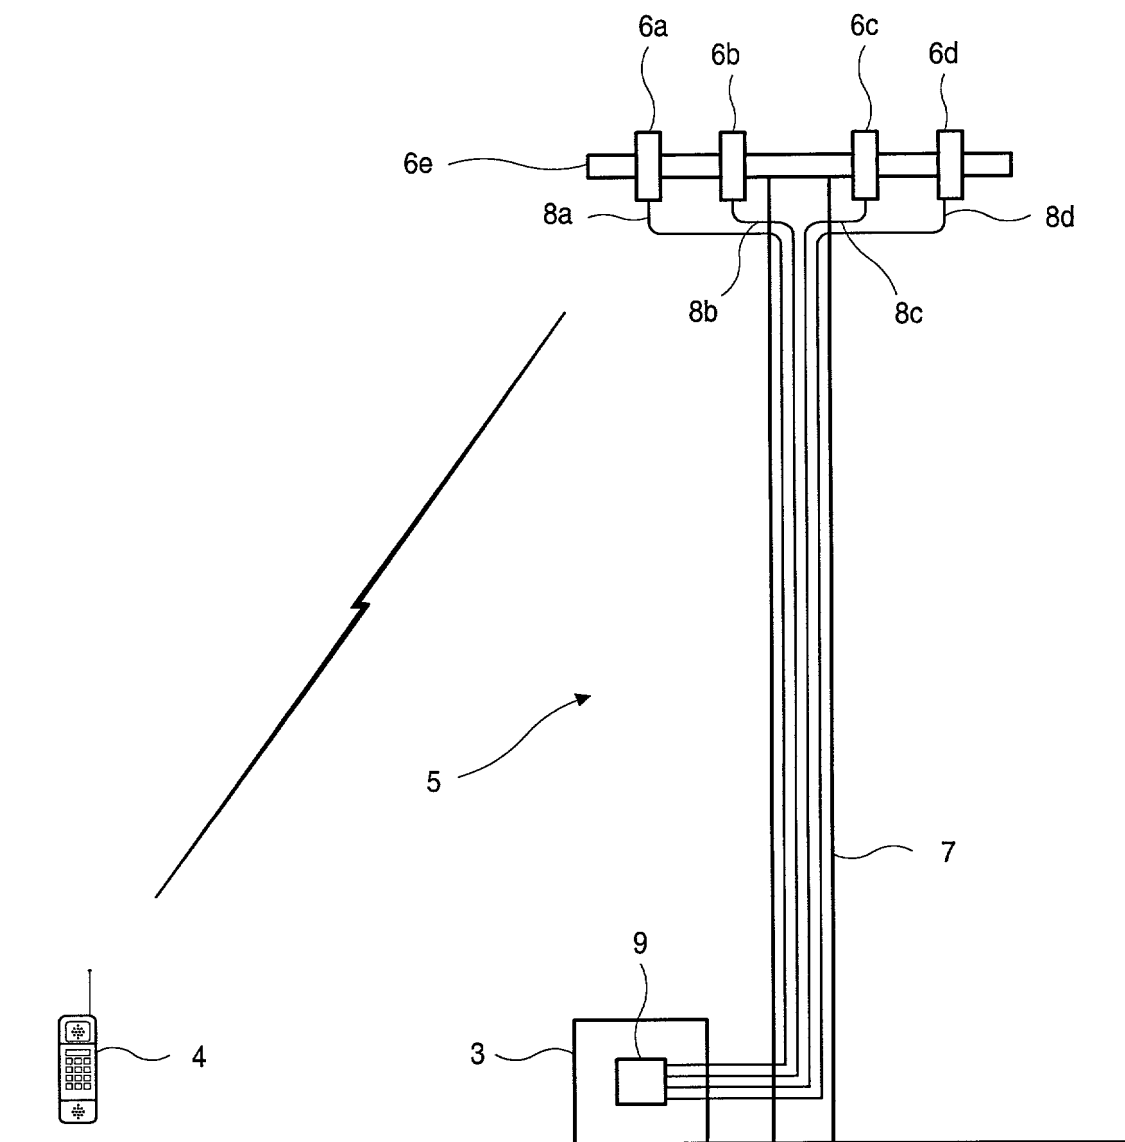


FIG. 1

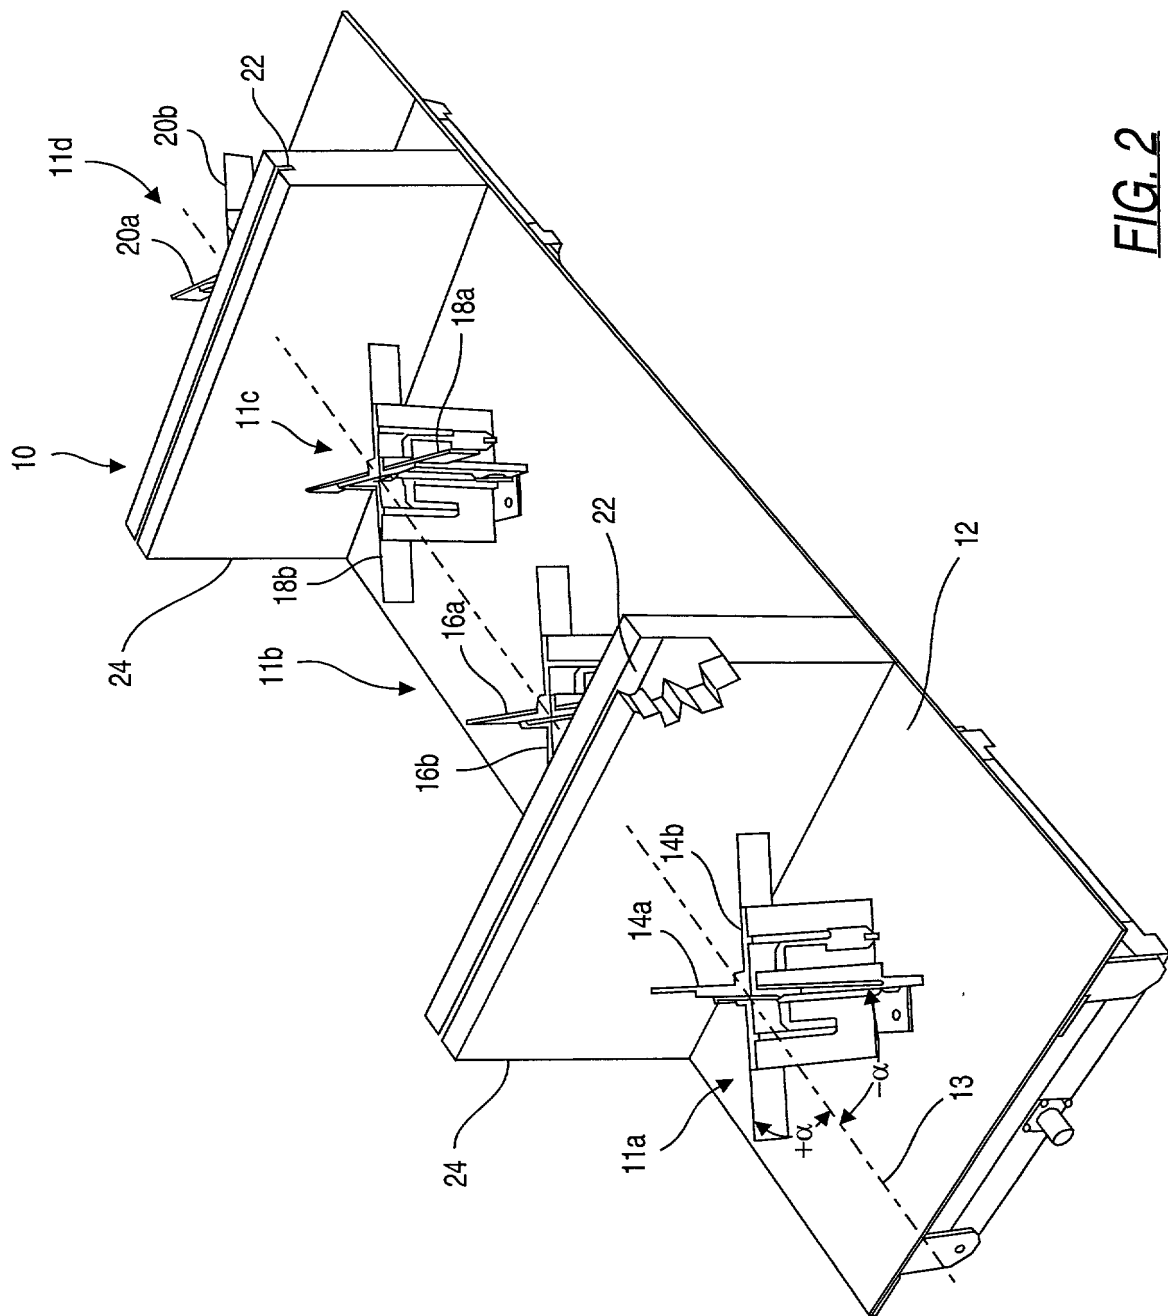


FIG. 2



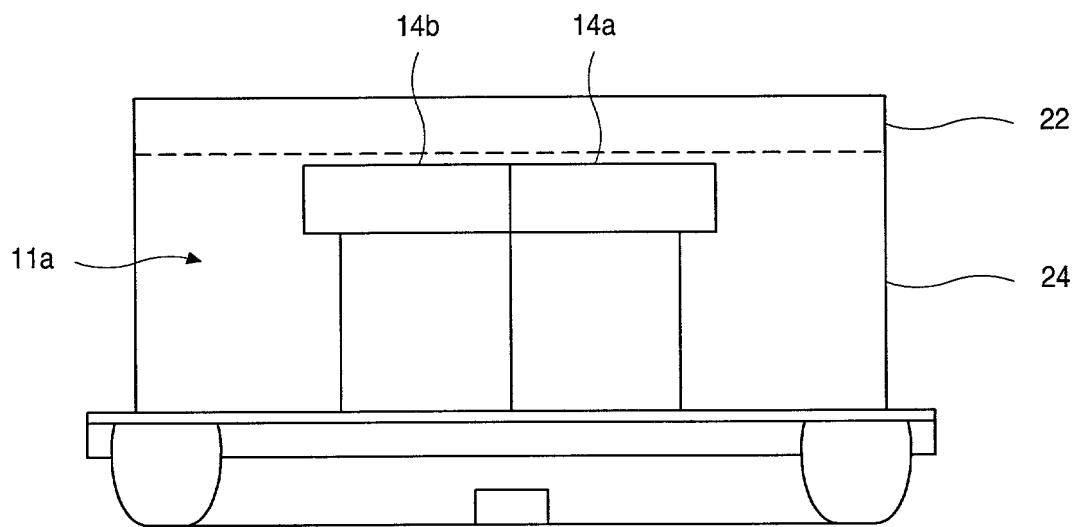


FIG. 4



FIG. 5

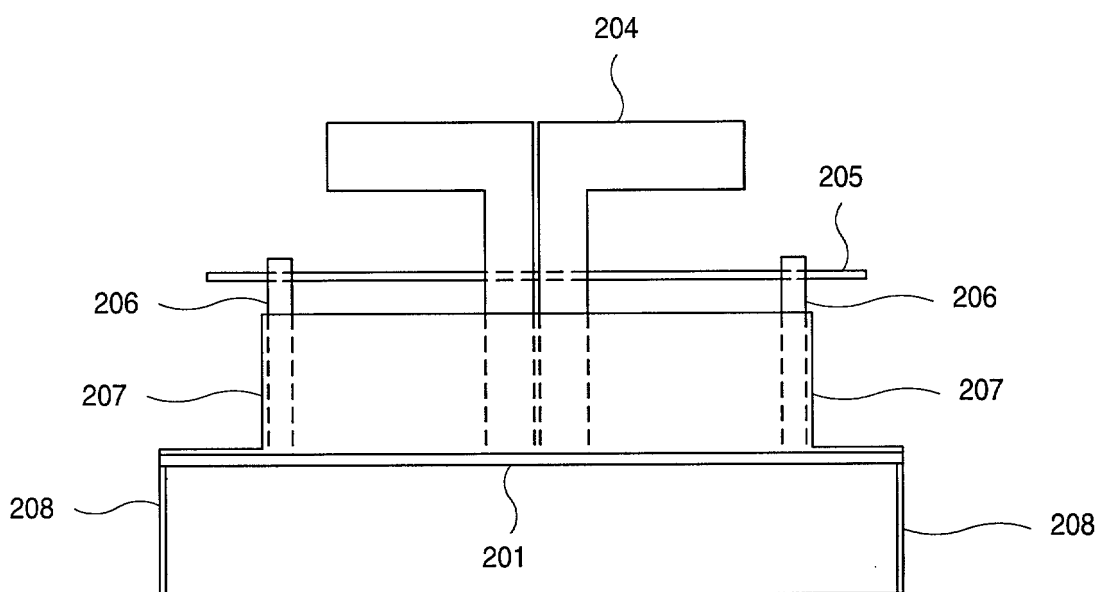


FIG. 6

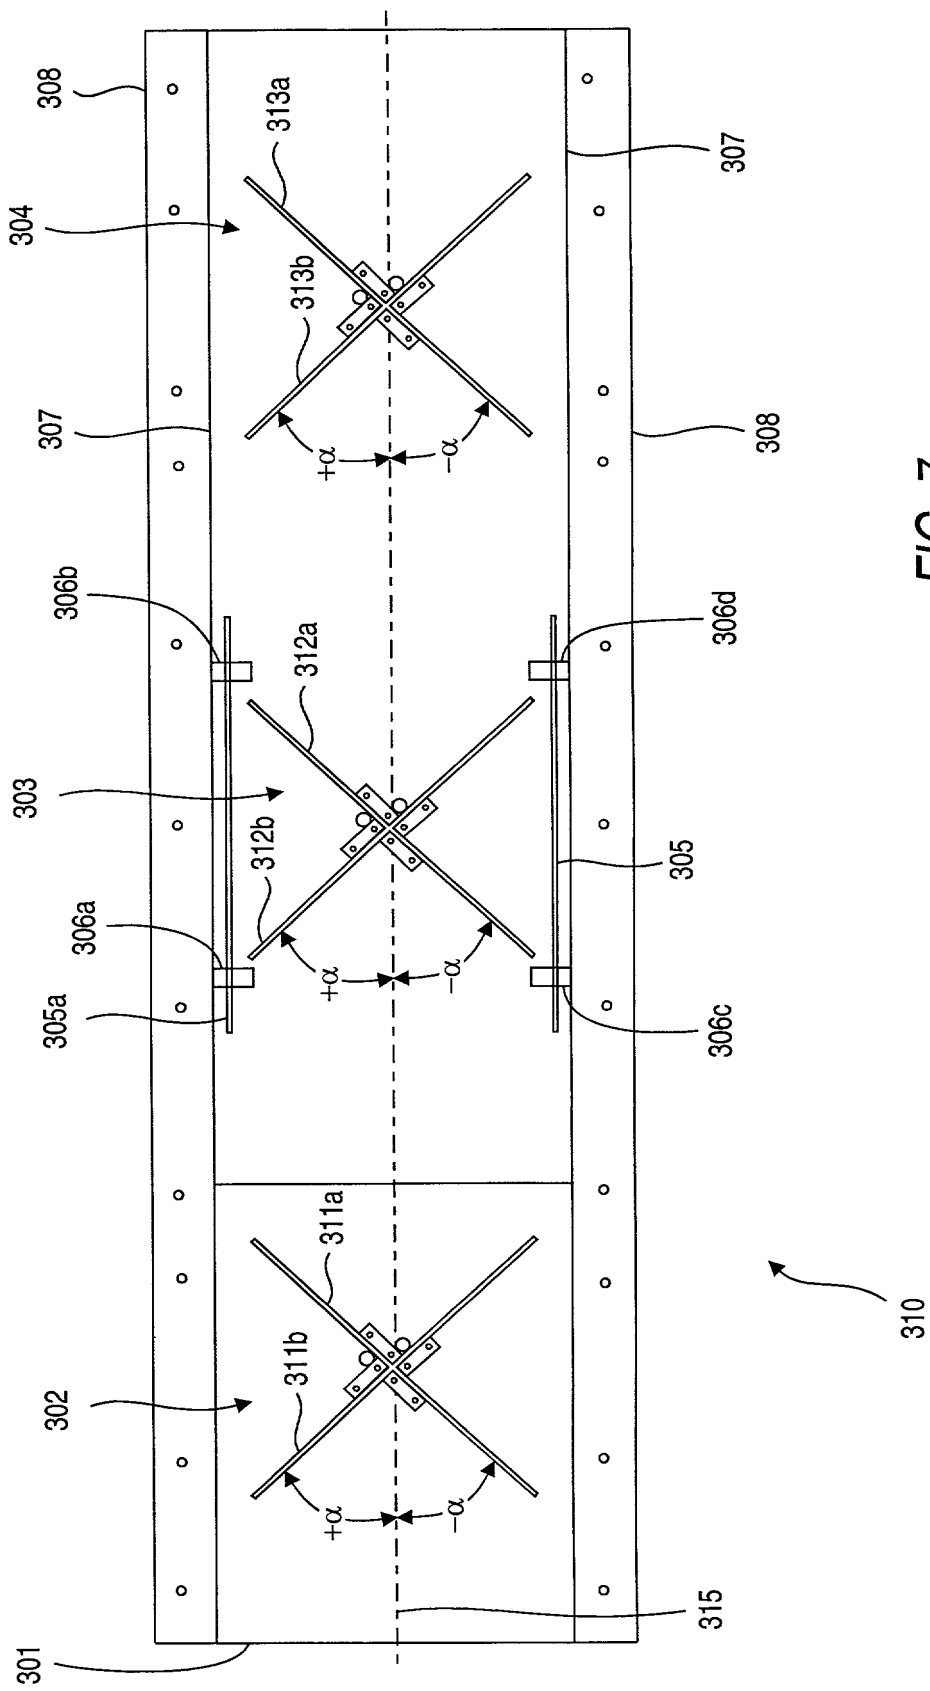


FIG. 7

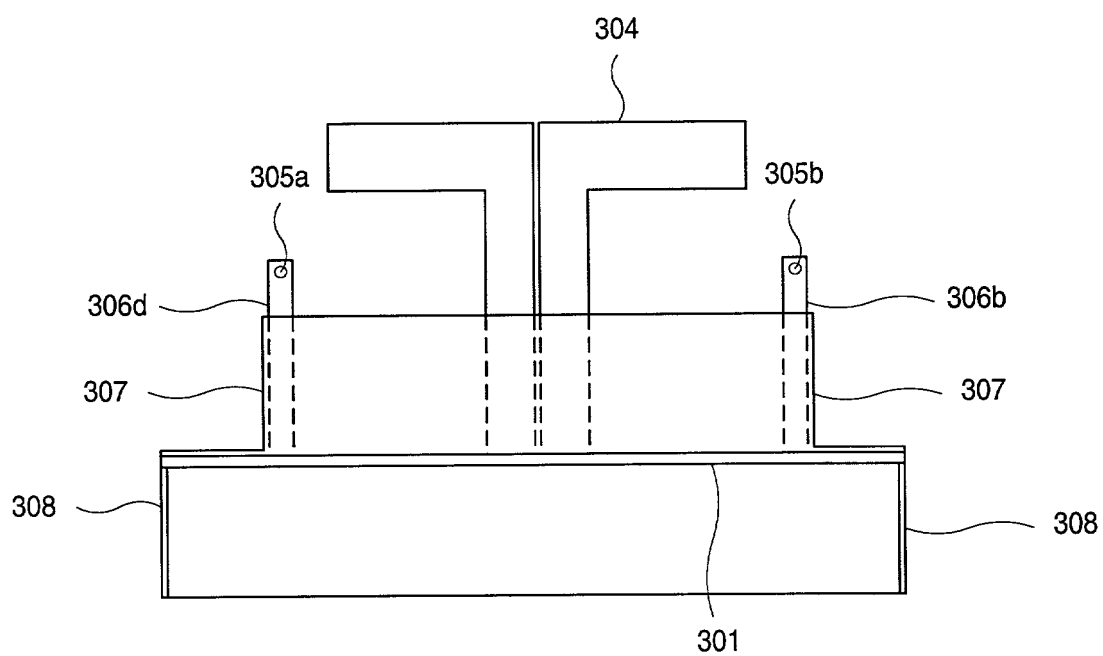


FIG. 8